

GL-8001

Used to connect the support system to the grounding wire, forming an electrical path and ensuring safe grounding of the system. Applicable to various photovoltaic support systems. Ensures low impedance conduction and reliable grounding safety.



Application	Secures two adjacent panels to rail
Key Features	Dual-Panel Fixing – Secures two adjacent panels to the rail simultaneously, ensuring stable connection. Symmetrical Design – Provides even spacing and balanced clamping force between panels. Durable Material – Corrosion-resistant aluminium alloy for long-term outdoor performance.
Dimensions	50mm
Specification	Anodizing treatment 10μm
Material	AL6005-T6& SUS304
Color	Silver
Warranty	10 years and 25 years service life

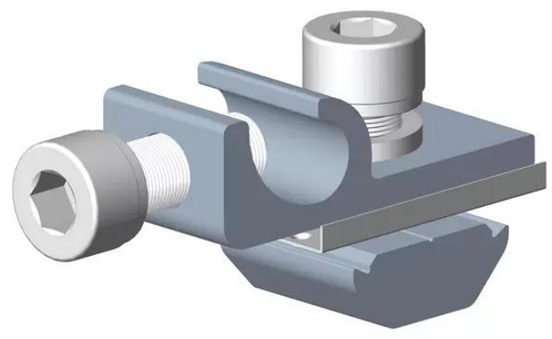

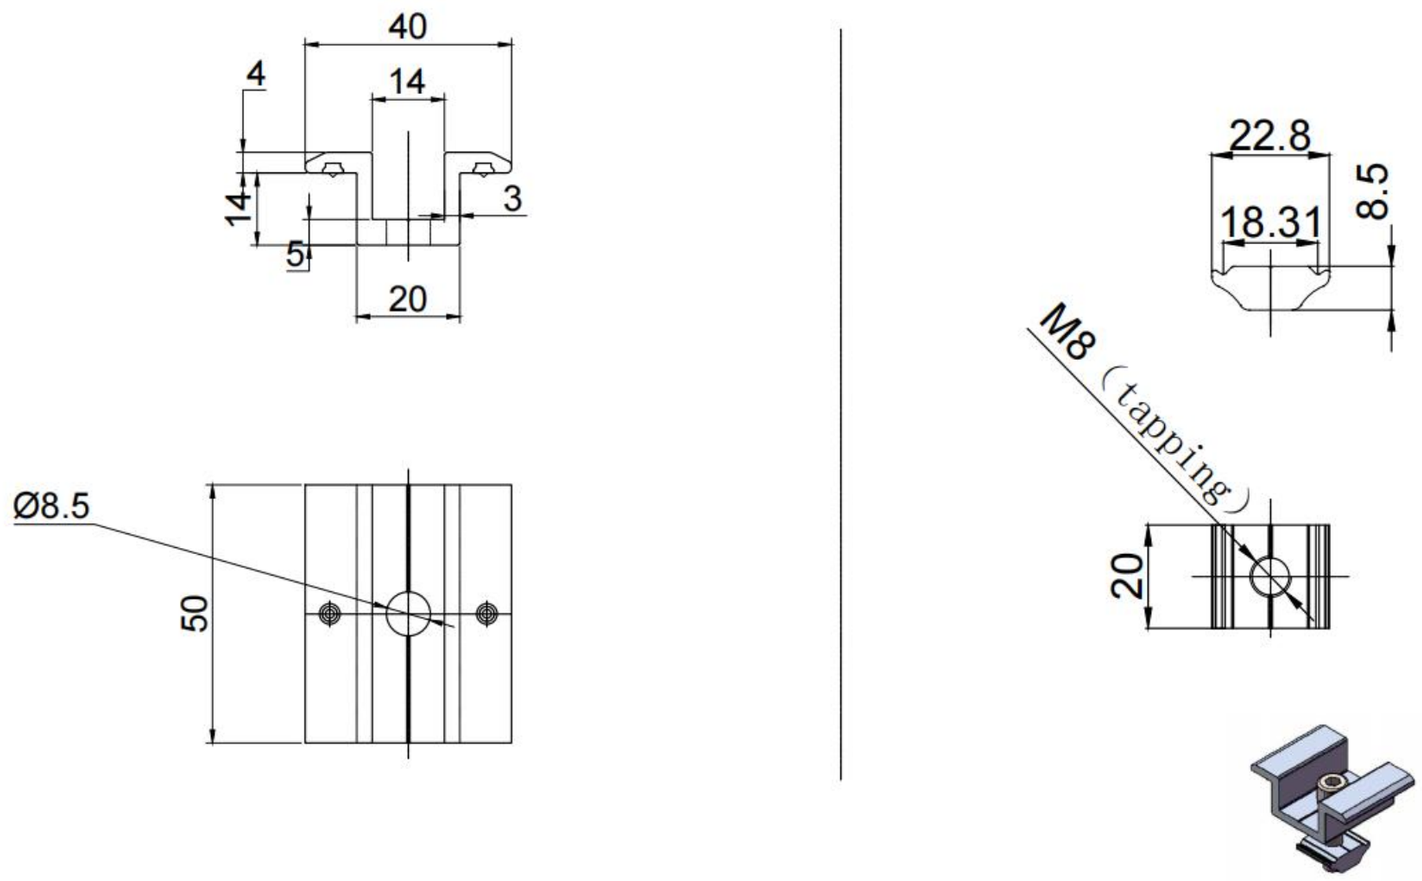

Pre-assembled Structure

Reduces component handling and speeds up installation.



Wide Compatibility

Suitable for 30mm and 35mm panel frames, covering most common module thicknesses.