
POWERCO

RL-8023+FA-0131

The L-foot, an aluminum alloy base, supports and positions the panel rails, while self-drilling screws secure the L-foot to the metal roof. This combination solution is widely used in industrial, commercial, and large-scale rooftop photovoltaic projects. It offers high installation efficiency and reliable connections.



Application	Pitched Rooftop
Key Features	Complete Solution: Bracket and screw work together for fast, secure rail attachment.
Quick Installation	Screw fixes L Foot directly to metal roof.
Reliable & Watertight	EPDM sealing washer prevents leaks; stable L Foot supports rail alignment.
Dimensions	40mm
Specification	Anodizing treatment 10μm
Material	AL6005-T6& SUS304
Color	Silver
Warranty	10 years and 25 years service life

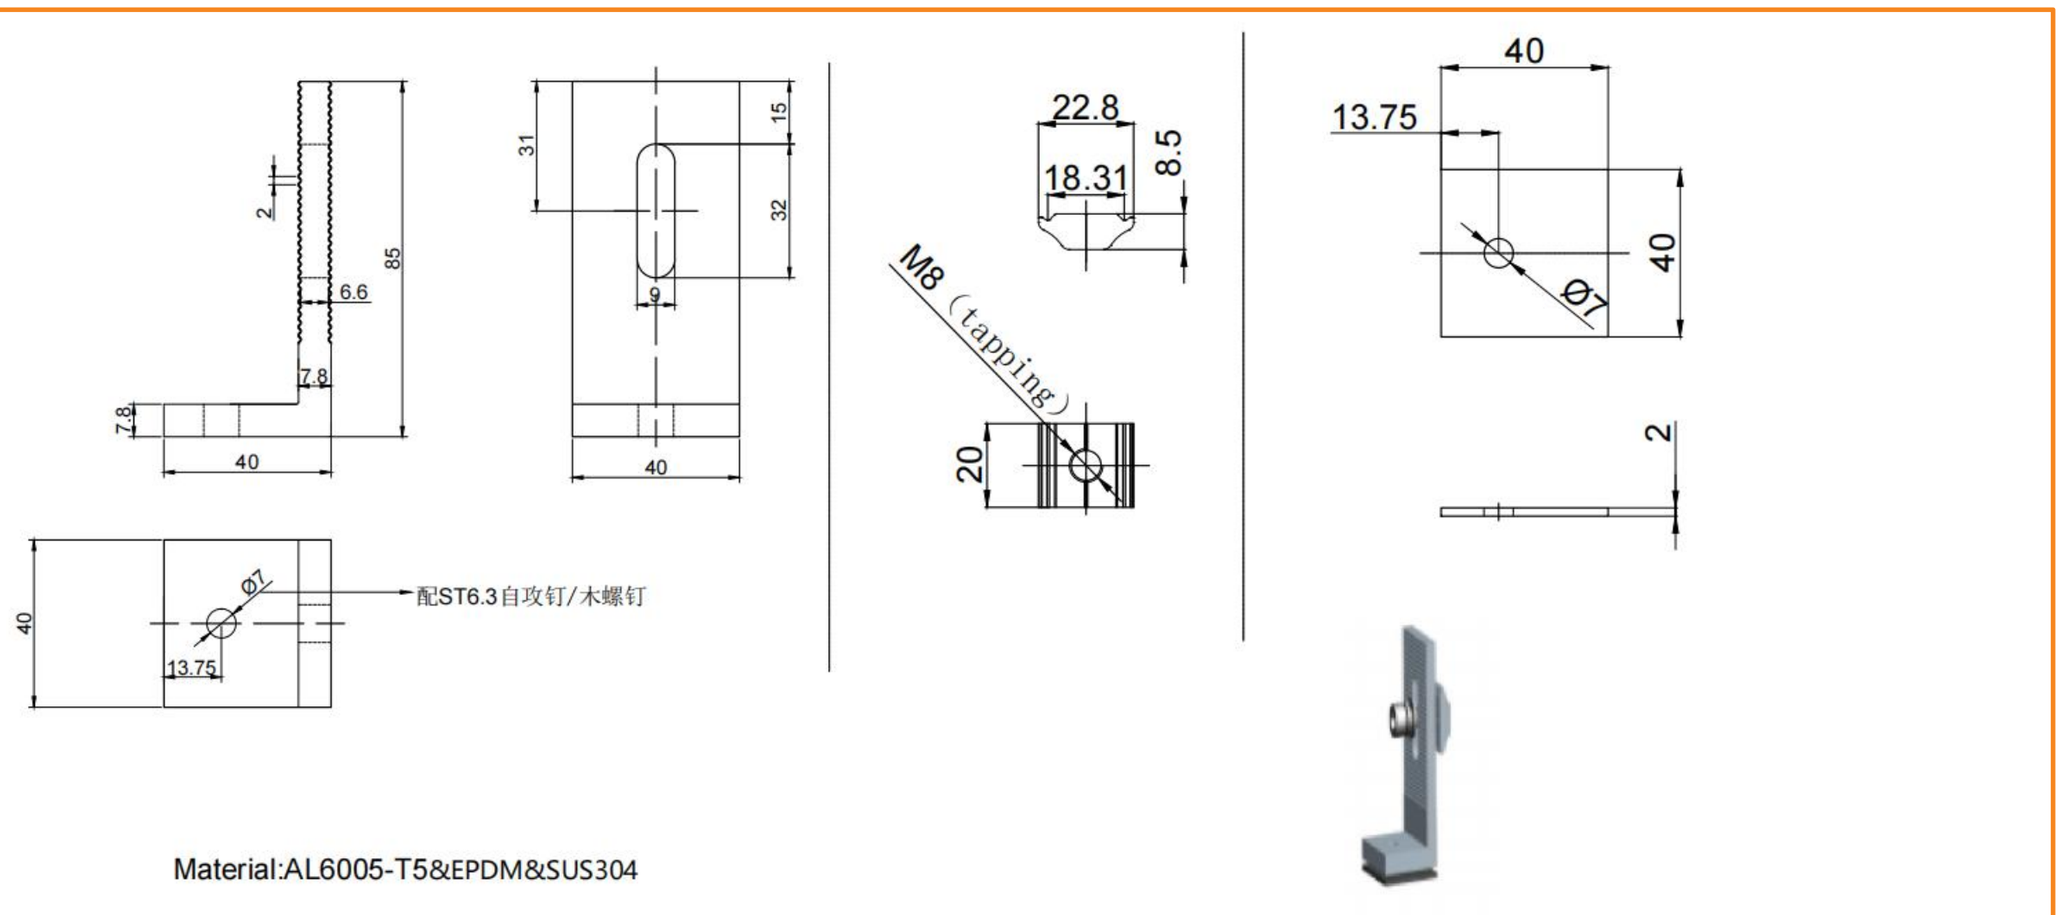



Durable Build:
Anodised aluminium bracket with corrosion-coated screw ensures long-term performance.



Versatile Use:
Suitable for trapezoidal and standing seam metal roofs in commercial & industrial projects.