
POWERCO

CM-8192

Used to secure two adjacent solar panels to the rail within the array. Commonly applied in rooftop and ground-mounted systems.



Application	Secures two adjacent panels to rail
Key Features	Dual-Panel Fixing – Secures two adjacent panels to the rail simultaneously, ensuring stable connection. Symmetrical Design – Provides even spacing and balanced clamping force between panels. Durable Material – Corrosion-resistant aluminium alloy for long-term outdoor performance.
Dimensions	50mm
Specification	Anodizing treatment 10μm
Material	AL6005-T6& SUS304
Color	Silver
Warranty	10 years and 25 years service life

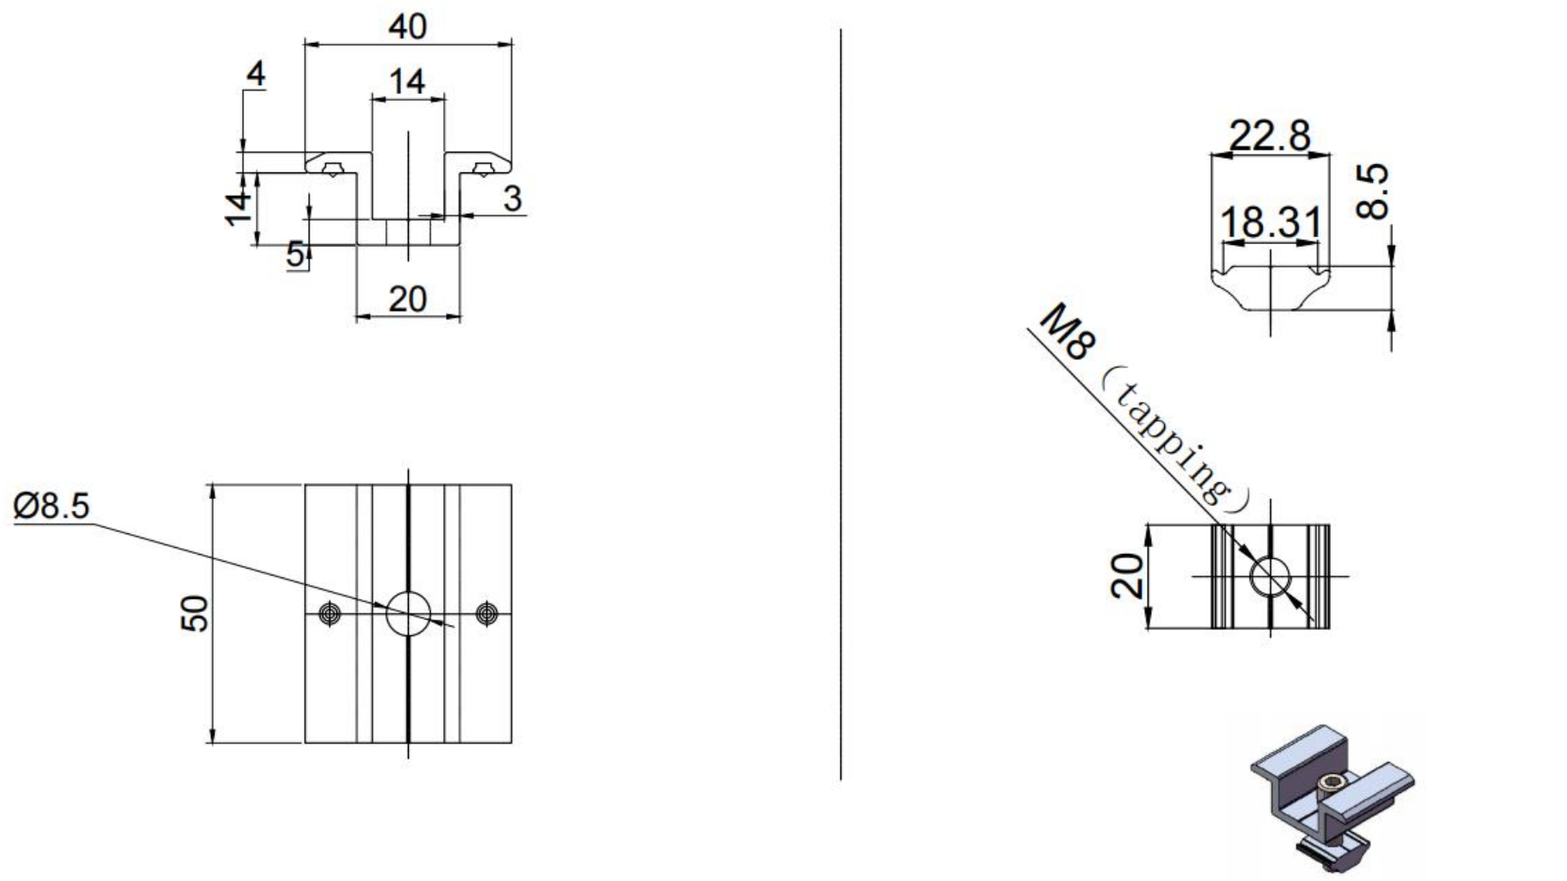



Pre-assembled Structure
Reduces component handling and speeds up installation.



Wide Compatibility
Suitable for 30mm and 35mm panel frames, covering most common module thicknesses.