

SR-8002

Used to join two rails end-to-end, extending the overall length of the rail. Commonly used in roof and ground mounting systems where the rail needs to continuously span multiple supports, ensuring a smooth and even joint and more efficient installation.



Application	Connect two rails
Key Features	Secure Splice Connection – Joins two rails end-to-end, providing continuous support for the array. Corrosion-Resistant Material – Made from durable aluminium alloy for long-term outdoor use.
Dimensions	150mm
Specification	Anodizing treatment 10μm
Material	AL6005-T6& SUS304
Color	Silver
Warranty	10 years and 25 years service life

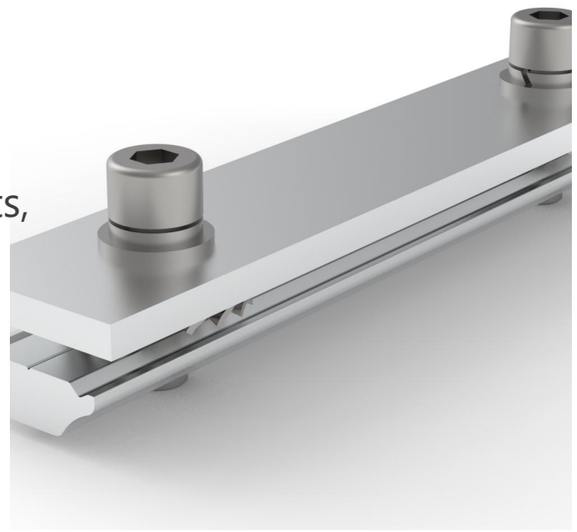

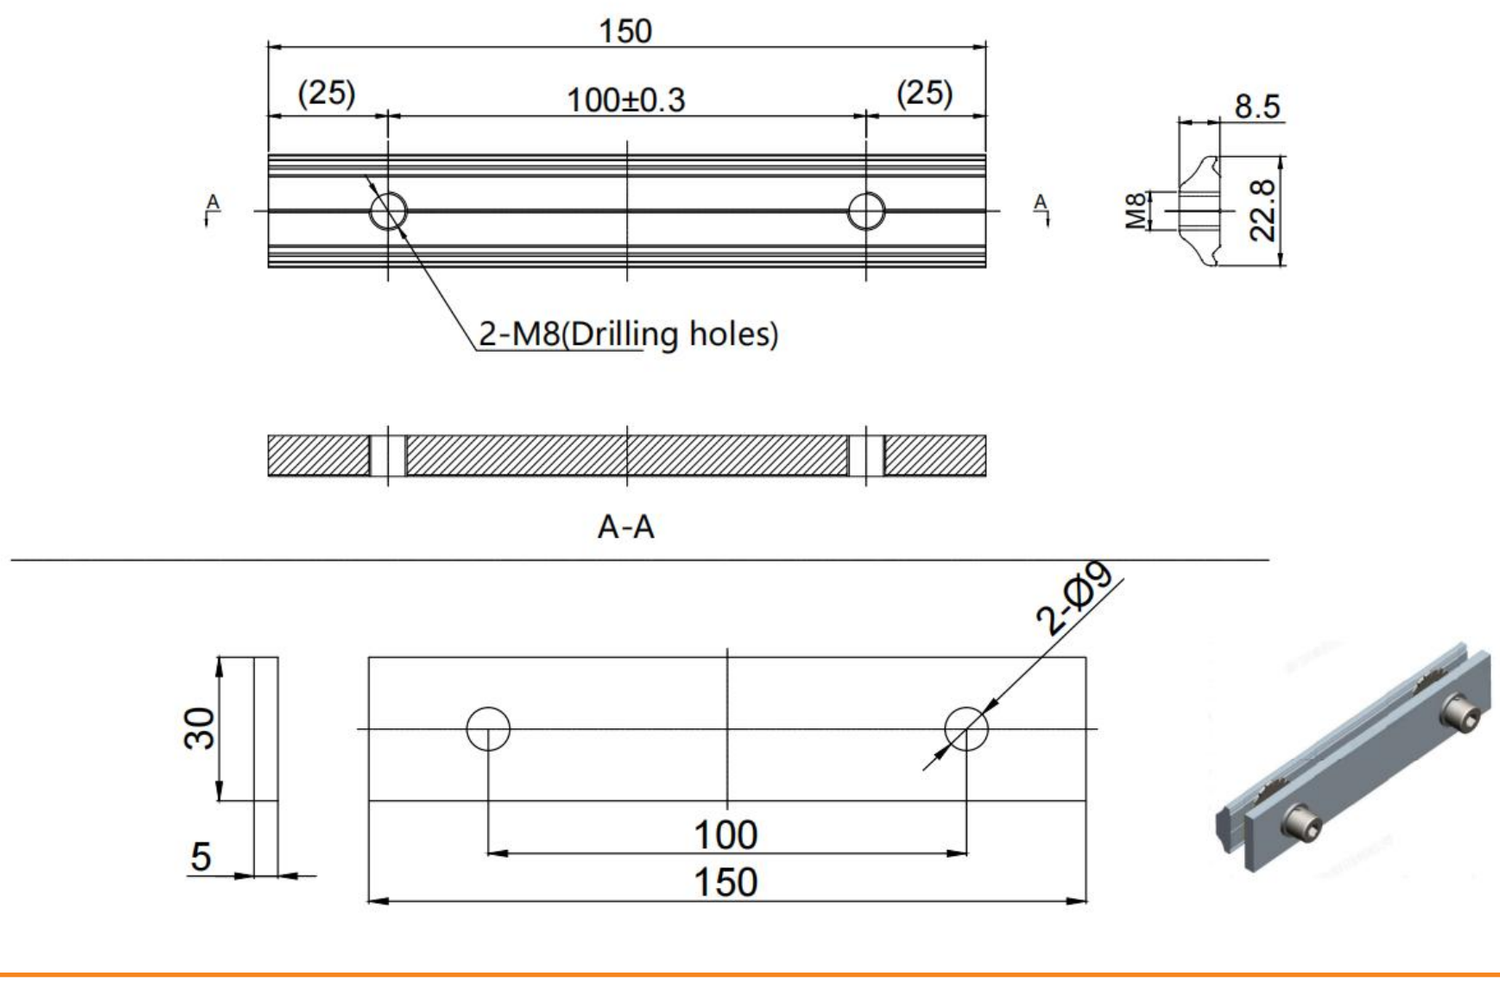

Easy Alignment

Built-in positioning guides ensure accurate rail alignment during installation.



High Load Capacity

Ensures strong and reliable connection for structural stability.